


The CWD-915 wireless USB adapter complies with 802.11n (draft 2.0) as well as 802.11b/g standards. The new CNet wireless-N dongle delivers high-speed connectivity and extended range to wireless networks. WPS support on CWD-915 provides a fast and easy secure network connection with WPS enabled access points on the network. With advanced wireless security, support for QoS and drivers support for major operating systems, CWD-915 is an ideal solution for any wireless network.

KEY FEATURES

- Complies with IEEE 802.11n Draft 2.0 and IEEE 802.11g/b standards
- Supports 64/128-bit WEP, WPA and WPA2 wireless security
- Supports WPS providing easy and secure wireless connections
- Cisco CCX compliance
- Supports WMM, improving user experience for multi-media applications.
- Supports Windows 2000/XP/Vista

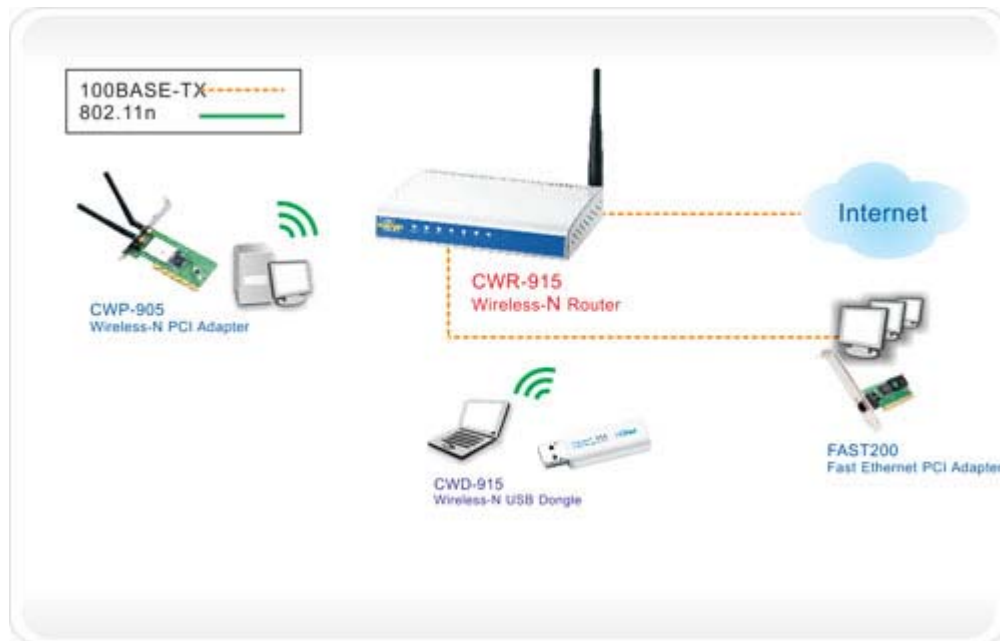

PRODUCT SPECIFICATIONS

Product Name	Wireless-N USB Dongle
Model	CWD-915
Interface	USB Ver 2.0 (USB 1.1 compatible) USB type-A connector

Standard	IEEE 802.11 b IEEE 802.11g IEEE 802.11n Draft 2.0
Channel	1 ~ 11 for FCC 1 ~ 13 for ETSI
Modulation	11b: CCK, QPSK, BPSK 11g: OFDM 11n: OFDM
Data Rate	11b: 11/5.5/2/1Mbps 11g: 54/48/36/24/18/12/9/6Mbps 11n: (20MHz): MCS0-7, up to 72Mbps 11n: (40MHz): MCS0-7, up to 150Mbps
Security	WEP 64/128 WPA-Personal WPA-Enterprise WPA2-Enterprise
Antenna	One internal antenna
Transmit Power	11b: 17 +/-1.5dBm @ Normal Temp Range, typical 11g: 14 +/-1.5dBm @ Normal Temp Range, typical 11n: 14 +/-1.5dBm @ Normal Temp Range, typical
Receive Sensitivity	11b: -88 +/-2dBm 11g: -72 +/-2dBm 11n: -66 +/-2dBm
LED	Link / Activity
Driver	Windows 2000/XP/Vista
Environment	Operating Temperature: 32° ~ 104°F (0° ~ 40°C) Storage Temperature: -4° ~ 140°F (-20° ~ 60°C) Humidity: 10% ~ 90% Non-condensing
Certifications	CE, FCC
Dimensions (L x W x H)	0.78 x 2.24 x 0.4 inches (19.5 x 56 x 10 mm)